


1. Talpa se monteaza pe capac prin coada de randunica Detaliu A ,se lipeste cu clei si se fixeaza din interior cu 4 holsuruburi echidistante 4x35 EN 14592
2. Scandurile se imbrina conform Detaliu B si se lipesc cu clei
3. Latimea scanurii la exterior minim 80mm, la interior min 60mm

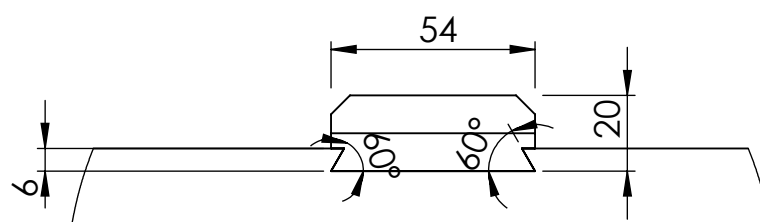

Technical drawing of a mechanical part, likely a bracket or support, showing dimensions in millimeters. The part has a curved top surface and a central rectangular cutout. Dimensions include: a total width of 7 mm at the base, a central cutout width of 6 mm, a cutout depth of 9 mm, a total height of 10 mm, and a small square feature on the right side.

Detaliu B
Scara 2 : 5

Proiectat	Teh.Popa M.												
Desenat	Teh.Popa M.												
Verificat	Ing.Necsa I.												
Contr.STAS	Ing.Cerneza E.												
Aprobat	Ing.Pop L.												
F.A.CUGIR						Scara: 1 : 5		Capac					
						Data: 12.11.15							